

538,250

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/053384 A2

(51) International Patent Classification⁷: **F17D**

(21) International Application Number: **PCT/NO2003/000414**

(22) International Filing Date: 10 December 2003 (10.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 2002 5926 10 December 2002 (10.12.2002) NO

(71) Applicant (for all designated States except US): MOSS MARITIME AS [NO/NO]; P.O.Box 120, N-1325 LYSAKER (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KRISTENSEN, Per, Herbert [NO/NO]; Mallingsrudveien 28, N-1349 RYKKIN (NO). LIEN, Bjørn, R. [NO/NO]; Veslekronen 9, N-0379 OSLO (NO). CHRISTIANSEN, Per, Erik [NO/NO]; Morenen 62, N-1519 MOSS (NO).



(74) Agents: ONSAGERS AS et al.; P.O.Box 6963 St. Olavs plass, N-0130 OSLO (NO).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYSTEM AND METHOD TO TRANSFER FLUID

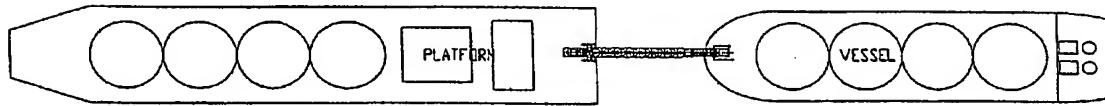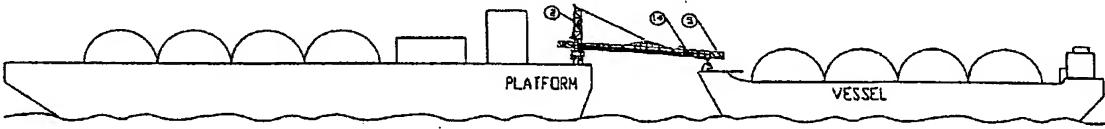

LNG OFFLOADING
PRINCIPAL CONFIGURATION

WO 2004/053384 A2

(57) Abstract: The invention relates to a system to transfer fluid via at least one pipeline from one structure to another structure (such as a platform P and a vessel v respectively), in which one of the structures has an offloading arm 5 which is movable in two planes perpendicular to each other and in which a part of the offloading arm remote from the one structure is engagable with the other structure, so to allow linear and rotational movements between the structures. The pipeline along the offloading arm is configured to compensate for movements between the two structures in the longitudinal direction of the offloading arm.



Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.